

4




3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-06-08

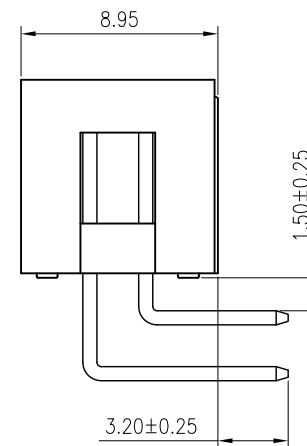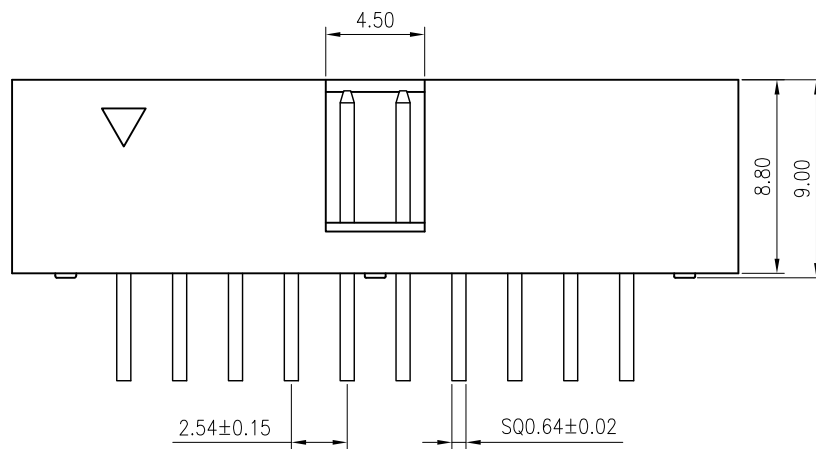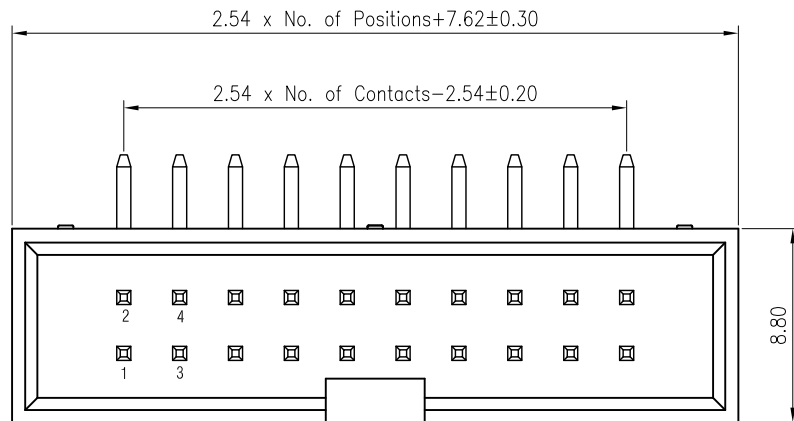

Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 30-50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T/PA9T + 30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤ 20mΩ/contact


Insulation resistance: ≥ 1000MΩ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperature: -40°C to +105°C

Wave soldering temperature: 255 ± 5°C, 10s

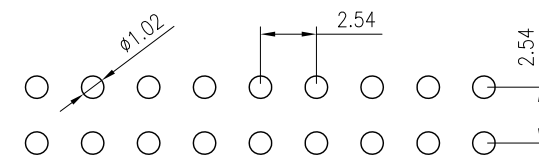

P.C.B LAYOUT

B06

12

XXX

XX

R

X

B

N

X

R001

Product Descriptions
B06 H9.0Product Type
12 Dual RowNo. of Positions
06,08,10,12,14,
16,18,20,24,26,
28,30,34,40,44,
50,60,64PContact Plated
SN Tin120μ"
MT 錫120μ"
GF Gold 0.8μ"
G1 Au1μ"
G3 Au3μ"
G4 Au5μ"
G6 Au10μ"
G7 Au15μ"
G8 Au30μ"
GA Au1.5μ"
S1 半金錫1μ"Angle Type
R Right AngleInsulator Material
A PBT
C PA6T
E PA9TInsulator Color
B BlackInsulator Feature
N Without PegPacking Options
A PE Bag
B TraySeries No.
R001
L16.5/21.5mm
PB1.5 PC3.2

GSAMTEK® 东莞市广溯电子科技有限公司
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2015-06-08	双排90度筒牛: PH2.54 H9.0 L16.5/21.5 PB1.5 PC3.2
X.XXX ±0.10	DRAWN :	SAMTEK	PART NO. B0612XXXXRXBNXR001
X.XX ±0.20	CHECKED :		DRAWING NO.
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			

4

3

2

1