

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2019-01-10

## Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance:  $\leq 20m\Omega$ /contact

Insulation resistance:  $\geq 500M\Omega$  at V=100V





Withstanding Voltage: 300V AC/minute

Mechanical:

Operating temperature:  $-40^{\circ}C$  to  $+105^{\circ}C$

Wave soldering temperature:  $255 \pm 5^{\circ}C, 10s$

PROJECT	PA (mm)	PB1 (mm)	PB2 (mm)	PC (mm)
Standard	3.00	xx	xx	2.00
Specified				

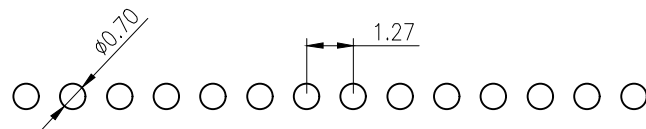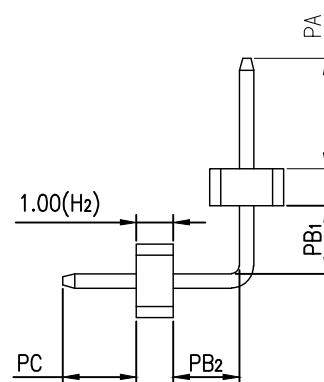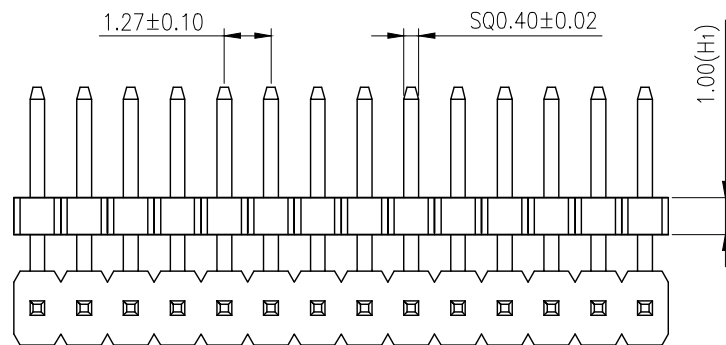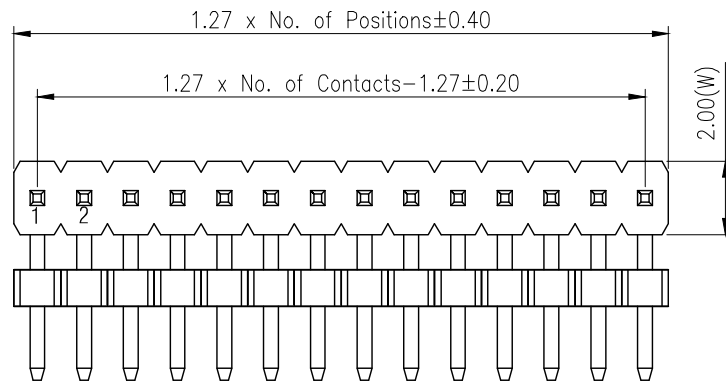

P.C.B LAYOUT

PC01	1XX2	R	XX	X	B	N	A	RXXX
Product Descriptions PC01 H1.0 W2.0	No. of Positions 02-50P	Angle Type R Right Angle	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag	Series No. DXXX L=PA+H1+PB1+PB2+H2+PC

**GSAMTEK® 东莞市广溯电子科技有限公司**  
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE $\pm 5^{\circ}$	DATE:	2019-01-10	单排双型90度排针 PH1.27 H1.0 W2.0 系列图
X.XXX $\pm 0.10$	DRAWN:	SAMTEK	PART NO. PC011XX2RXXXBXXRXXX
X.XX $\pm 0.20$	CHECKED:		DRAWING NO.
X.X $\pm 0.30$	APPROVED:		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. $\pm 0.50$			