

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2018-01-03

## Specification

### Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T/PA9T/LCP+30%G.F

### Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance:  $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance:  $\geq 500\text{M}\Omega$  at  $V=100\text{V}$





Withstanding Voltage: 300V AC/minute

### Mechanical:

Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Wave soldering temperature:  $255 \pm 5^{\circ}\text{C}, 10\text{s}$

PROJECT	PA (mm)	PD (mm)	PC (mm)
Standard	3.00	XXX	2.00
Specified			

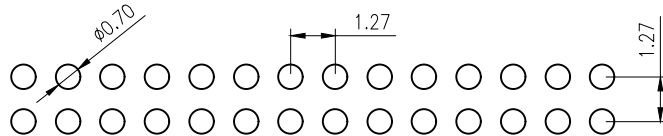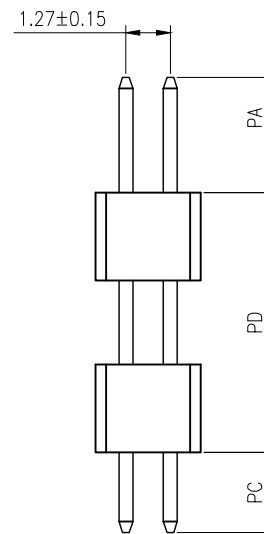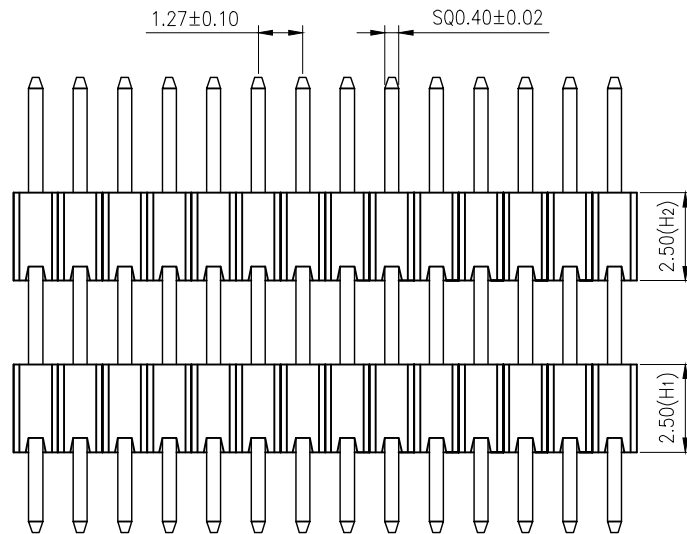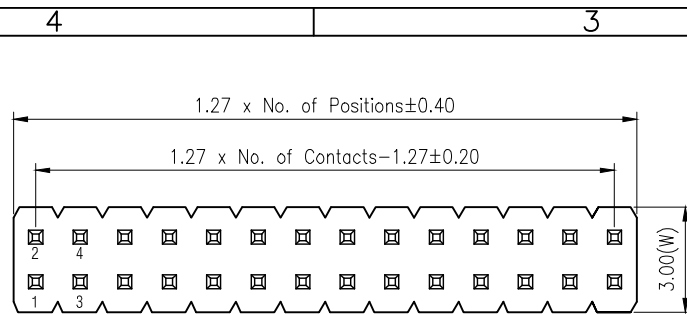

P.C.B LAYOUT

PC11	2XX2	D	XX	X	B	N	X	DXXX
Product Descriptions PC11 H2.5 W3.0	No. of Positions 02-50P	Angle Type D Straight	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag C PVC Box D Tube E Tube+CAP F Tape Reel G Reel+CAP	Series No. DXXX L=PA+PD+PC

GSAMTEK® 东莞市广溯电子科技有限公司 DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD				
TOLERANCE	PROJECTON		TITLE: 双排双塑180度排针 PH1.27 H2.5 W3.0 系列图	
ANGLE $\pm 5^{\circ}$	DATE :	2018-01-03	PART NO. PC112XX2DXXXBNXDXXX	
X.XXX $\pm 0.10$	DRAWN :	SAMTEK	DRAWING NO.	
X.XX $\pm 0.20$	CHECKED :		REV: A0	UNIT: mm
X.X $\pm 0.30$	APPROVED :		SCALE: 3:1	SIZE: A4
X. $\pm 0.50$				