

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2019-03-20

## Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 2.0Amps/contact max.

Contact resistance:  $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance:  $\geq 1000\text{M}\Omega$  at  $V=100\text{V}$





Withstanding Voltage: 500V AC/minute

Mechanical:

Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Wave soldering temperature:  $255 \pm 5^{\circ}\text{C}, 10\text{s}$

PROJECT	PA (mm)	PB (mm)	PC (mm)	PD(mm)
Standard	4.00	0.75	2.8	XXX
Specified				

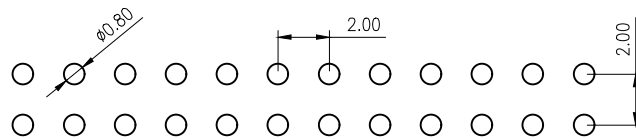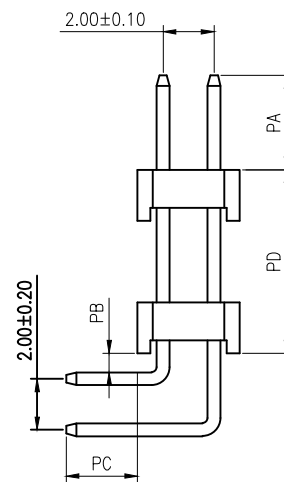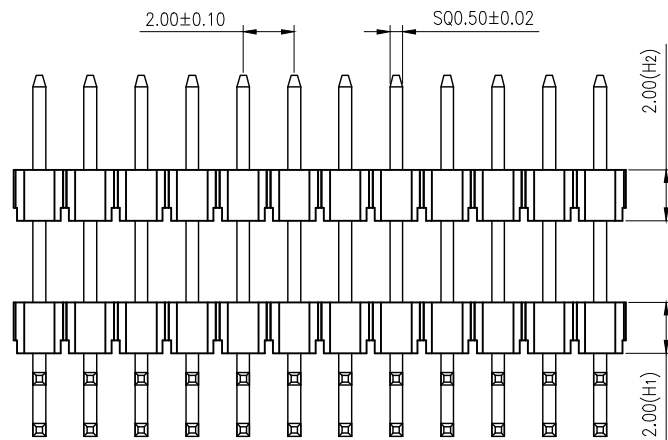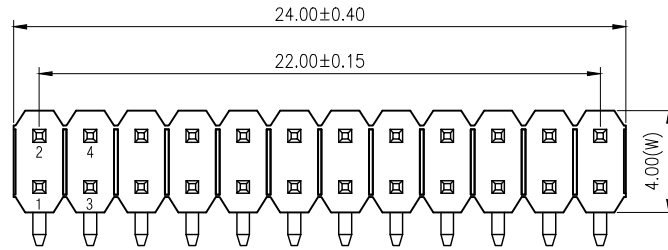

P.C.B LAYOUT

PD03	2XX2	R	XX	X	B	N	A	RXXX
Product Descriptions PD03 H2.0 W4.0	No. of Positions 02-40P	Angle Type R Right Angle	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material A PBT C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag	Series No. RXXX $L1=PA+PB+PC+PD+(W-2.0)/2$ $L2=L1+4.0$

**GSAMTEK® 东莞市广溯电子科技有限公司**  
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE $\pm 5^{\circ}$	DATE: 2019-03-20	双排双翘90度排针 PH2.0 H2.0 系列图
X.XXX $\pm 0.10$	DRAWN: SAMTEK	PART NO. PD032XX2RXXXBNARXXX
X.XX $\pm 0.20$	CHECKED:	DRAWING NO.
X.X $\pm 0.30$	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. $\pm 0.50$		