

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2019-11-12

Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$





Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Wave soldering temperature: $255 \pm 5^{\circ}\text{C}, 10\text{s}$

PROJECT	PA (mm)	PB (mm)	PC (mm)	PD (mm)
Standard	6.00	1.20	XXX	XXX
Specified				

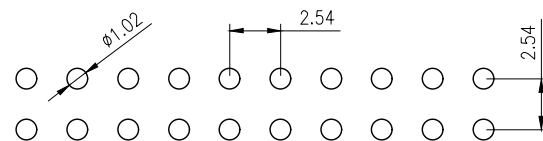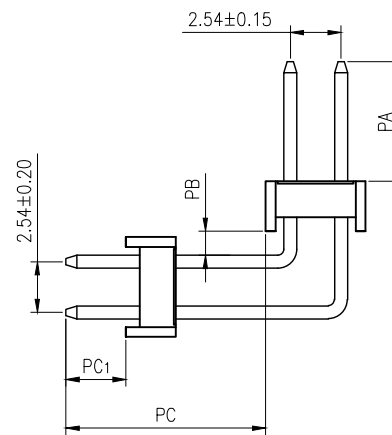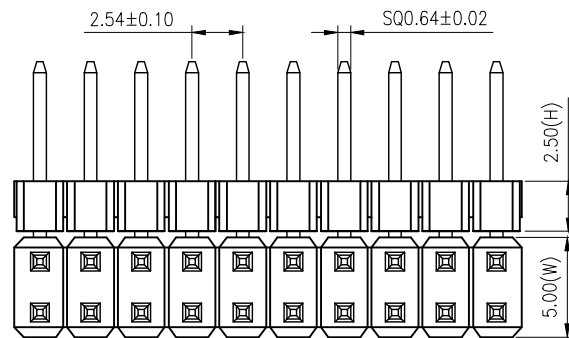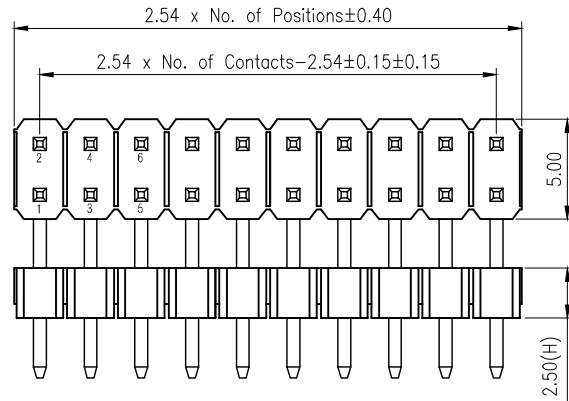

P.C.B LAYOUT

PF05	2XX2	R	XX	X	B	N	A	RXXX
Product Descriptions PF05 H2.5 W5.0	No. of Positions 02-40P	Angle Type R Right Angle	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material A PBT C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag	Series No. RXXX $L_1 = PA + PB + PC + (W - 2.54) / 2$ $L_2 = L_1 + 5.0$

GSAMTEK® 东莞市广溯电子科技有限公司
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE $\pm 5^{\circ}$	DATE: 2019-11-12	双排双塑90度排针 PH2.54 H2.5 系列图
X.XXX ± 0.10	DRAWN: SAMTEK	PART NO. PF052XX2RXXXBNARXXX
X.XX ± 0.20	CHECKED:	DRAWING NO.
X.X ± 0.30	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50		

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2019-11-12

Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$





Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Wave soldering temperature: $255 \pm 5^{\circ}\text{C}, 10\text{s}$

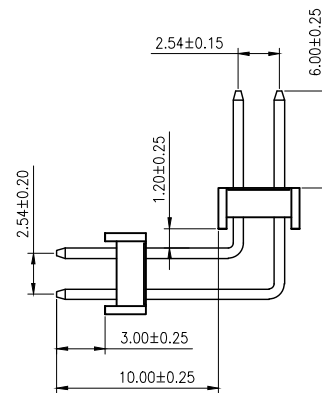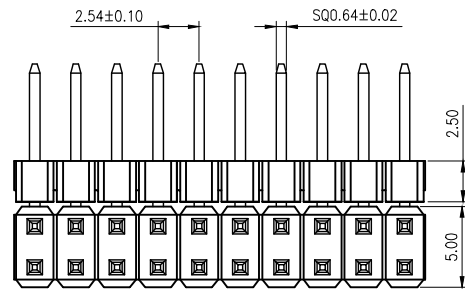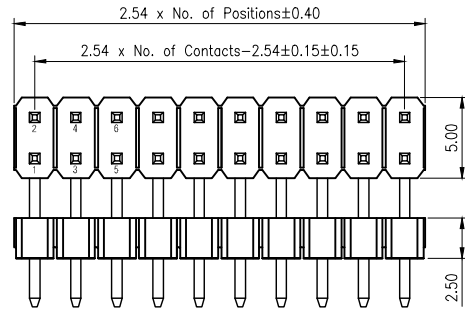

P.C.B LAYOUT

PF05	2XX2	R	XX	X	B	N	A	R009
Product Descriptions PF05 H2.5 W5.0	No. of Positions 02-40P	Angle Type R Right Angle	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material A PBT C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag	Series No. R009 L20.8/25.8 PA6.0 PB1.2 PC10.0/3.0

GSAMTEK® 东莞市广溯电子科技有限公司
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE $\pm 5^{\circ}$	DATE:	2019-11-12	双排双塑90度排针 PH2.54 H2.5 L20.8/25.8 PA6.0 PB1.2 PC10.0/3.0
X.XXX ± 0.10	DRAWN:	SAMTEK	PART NO. PF052XX2RXXXBNAR009
X.XX ± 0.20	CHECKED:		DRAWING NO.
X.X ± 0.30	APPROVED:		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50			