

4





3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2017-11-06

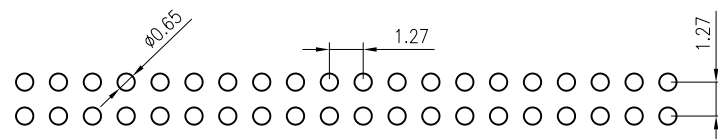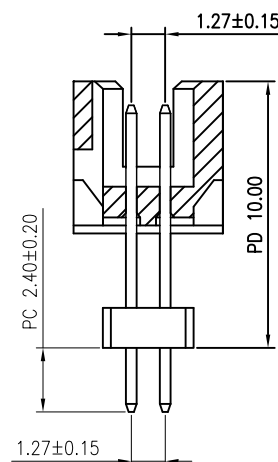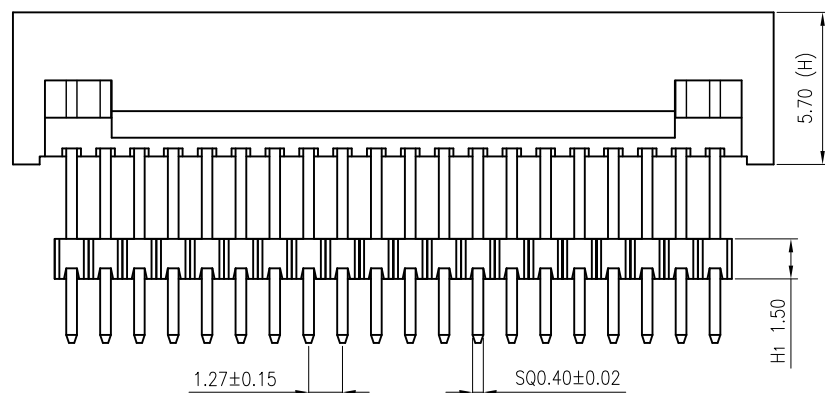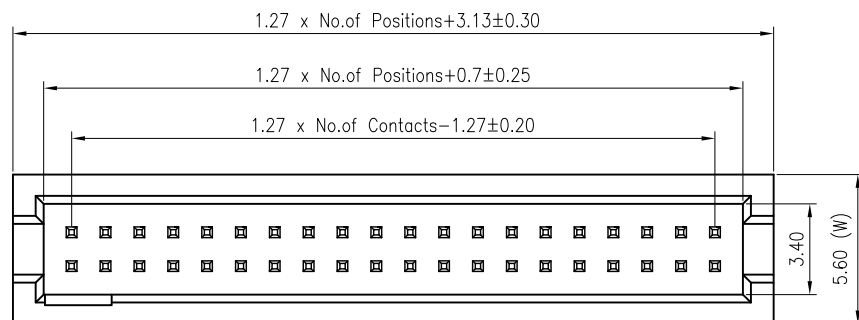

P.C.B LAYOUT

Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T/PA9T/LCP + 30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥500MΩ at V=100V

Withstanding Voltage: 300V AC/minute

Mechanical:

Operating temperature: -40°C to +105°C

Reflow soldering temperature: 260±5°C,10s

PROJECT	H _i (mm)	PD (mm)	PC (mm)
Standard	1.50	10.00	2.40
Specified			

BC01

2XX2

D

XX

X

B

N

X

D001

Product Descriptions
BC01 H5.7 W5.6No. of Positions
03-50PAngle Type
D StraightContact Plated
SN Tin120u"
MT 锡120u"
GF Gold 0.8u"
G1 Au1u"
G3 Au3u"
G4 Au5u"
G6 Au10u"
G7 Au15u"
G8 Au30u"
GA Au1.5u"
S1 半金锡1u"Insulator Material
C PA6T
E PA9T
F LCPInsulator Color
B BlackInsulator Feature
N Without PegPacking Options
A PE Bag
C PVC Box
D Tube
E Tube+CAP
F Tape Reel
G Reel+CAPSeries No.
D001 L11.5mm
PD10.0 PC2.4

GSAMTEK® 东莞市广溯电子科技有限公司
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2017-11-06	双排双塑180度筒牛 PH1.27 H5.7 L11.5 PD10.0 PC2.4
X.XXX ±0.10	DRAWN :	SAMTEK	PART NO. BC012XX2DXXXBNXD001
X.XX ±0.20	CHECKED :		DRAWING NO.
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			

4

3

2

1