


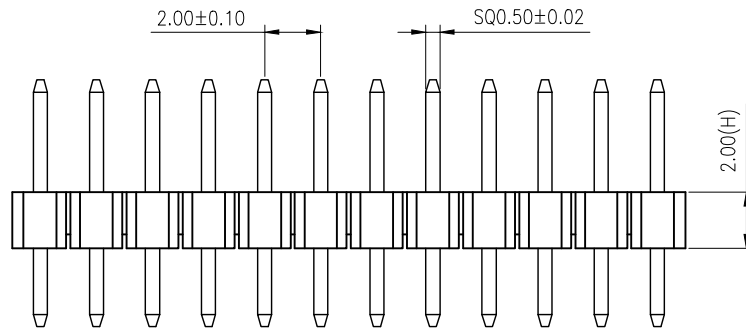


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-06-08

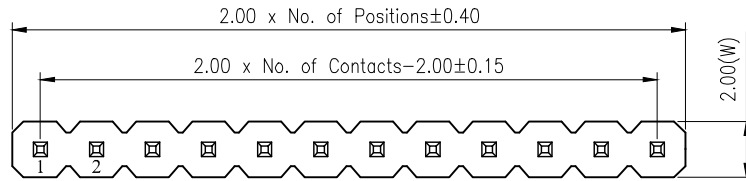

P.C.B LAYOUT

Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 2.0Amps/contact max.

Contact resistance: $\leq 20m\Omega$ /contact

Insulation resistance: $\geq 1000M\Omega$ at V=100V

Withstanding Voltage: 500V AC/minute

Mechanical:

Operating temperature: -40°C to +105°C

Wave soldering temperature: 255±5°C, 10s





PROJECT	PA (mm)	H (mm)	PC (mm)
Standard	4.00	2.00	2.80
Specified			

PD03	1XX1	D	XX	X	B	N	A	DXXX
Product Descriptions PD03 H2.0 W2.0	No. of Positions 02-40P	Angle Type D Straight	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material A PBT C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag	Series No. DXXX L=PA+H+PC

GSAMTEK® 东莞市广溯电子科技有限公司
DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE: 2015-06-08	单排180度排针 PH2.0 H2.0 系列图
X.XXX ±0.10	DRAWN: SAMTEK	PART NO. PD031XX1DXXXBNAXXX
X.XX ±0.20	CHECKED:	DRAWING NO.
X.X ±0.30	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-06-08

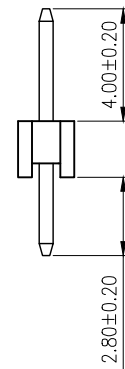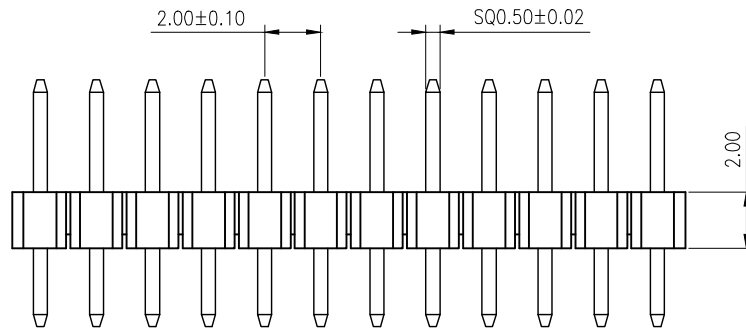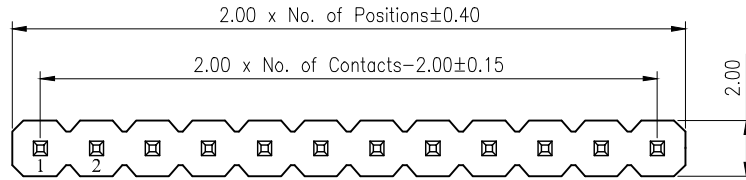

P.C.B LAYOUT

Specification

Material:

Contact Material: Brass

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 2.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 500V AC/minute

Mechanical:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Wave soldering temperature: $255 \pm 5^{\circ}\text{C}$, 10s

PD03	1XX1	D	XX	X	B	N	A	D001
Product Descriptions PD03 H2.0 W2.0	No. of Positions 02-40P	Angle Type D Straight	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Insulator Material A PBT C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options A PE Bag	Series No. D001 L8.8mm PA4.0 PC2.8

GSAMTEK® 东莞市广溯电子科技有限公司 DONGGUAN GUANG SU ELECTRONIC TECHNOLOGY CO.,LTD					
TOLERANCE ANGLE $\pm 5^{\circ}$ X.XXX ± 0.10 X.XX ± 0.20 X.X ± 0.30 X. ± 0.50	PROJECTON		TITLE: 单排180度排针 PH2.0 H2.0 L8.8 PA4.0 PC2.8		
	DATE :	2015-06-08	PART NO. PD031XX1DXXXBNAD001		
	DRAWN :	SAMTEK	DRAWING NO.		
	CHECKED :		REV:	UNIT:	SCALE:
APPROVED :		A0	mm	3:1	A4